


DIN 609 8.8 ZESKANT PASBOUT MET LANG DRAADGEDEELTE -STAAL

DIN 609 8.8 HEXAGON FIT BOLT WITH LONG THREAD – STEEL

DIN 609 8.8 CORPS DE BOUILON AJUSTE A TETE HEXAGONALE AVEC FILET LONG – ACIER

DIN 609 8.8 SECHSKANT-PASSSCHRAUBEN MIT LANGEM GEWINDEZAPFEN - STAHL

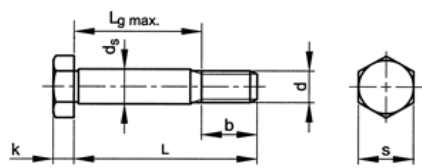

ISO :
DIN : 609
NEN : -
ANSI : B18.3.3M
BS : 4168-7
NF : -



M
St
8.8

P		1,25	1,5	1,75	2	2	2,5
b	1	14,5	17,5	20,5	22	25	27,5
	2	16,5	19,5	22,5	24	27	29,5
	3	-	-	-	-	-	-
ds	(k6) ⁴	9	11	13	15	17	19
k		5,3	6,4	7,5	8,8	10	11,5
s		13	16	18	21	24	27

d LENGTE	M8	M10	M12	M14	M16	M18
25	11040080025					
28	11040080028					
30	11040080030	11040100030	11040120030			
32	11040080032	11040100032	11040120032	11040140032		
35	11040080035	11040100035	11040120035	11040140035		
38	11040080038	11040100038	11040120038	11040140038		
40	11040080040	11040100040	11040120040	11040140040	11040160040	
42	11040080042	11040100042	11040120042	11040140042	11040160042	
45	11040080045	11040100045	11040120045	11040140045	11040160045	11040180045
48	11040080048	11040100048	11040120048	11040140048	11040160048	11040180048
50	11040080050	11040100050	11040120050	11040140050	11040160050	11040180050
55	11040080055	11040100055	11040120055	11040140055	11040160055	11040180055
60	11040080060	11040100060	11040120060	11040140060	11040160060	11040180060
65	11040080065	11040100065	11040120065	11040140065	11040160065	11040180065
70	11040080070	11040100070	11040120070	11040140070	11040160070	11040180070
75	11040080075	11040100075	11040120075	11040140075	11040160075	11040180075
80	11040080080	11040100080	11040120080	11040140080	11040160080	11040180080
85		11040100085	11040120085	11040140085	11040160085	11040180085
90		11040100090	11040120090	11040140090	11040160090	11040180090
100		11040100100	11040120100	11040140100	11040160100	11040180100
105			11040120105		11040160105	11040180105
110			11040120110		11040160110	11040180110
115			11040120115		11040160115	11040180115
120			11040120120		11040160120	11040180120
125					11040160125	
130					11040160130	
135					11040160135	
140					11040160140	
145					11040160145	
150					11040160150	
160					11040160160	
170					11040160170	
180					11040160180	
190					11040160190	
200					11040160200	

1: L ≤ 50 mm

2: 50 mm < L ≤ 150mm

3: L > 150mm

4: Tolerantie boorgat H7




DIN 609 8.8 ZESKANT PASBOUT MET LANG DRAADGEDEELTE - STAAL

DIN 609 8.8 HEXAGON FIT BOLT WITH LONG THREAD – STEEL

DIN 609 8.8 CORPS DE BOUILON AJUSTE A TETE HEXAGONALE AVEC FILET LONG – ACIER

DIN 609 8.8 SECHSKANT-PASSSCHRAUBEN MIT LANGEM GEWINDEZAPFEN - STAHL

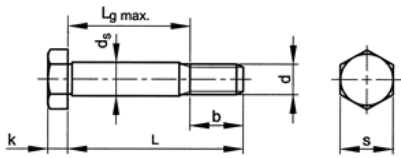

ISO :
DIN : 609
NEN : -
ANSI : B18.3.3M
BS : 4168-7
NF : -



M
St
8.8

P		2,5	2	2,5	3	2	3
b	1	28,5	28,5	32,5	-	-	-
	2	30,5	30,5	34,5	36,5	36,5	39,5
	3	35,5	35,5	39,5	41,5	41,5	44,5
ds	(k6) ⁴	21	21	23	25	25	25
k		12,5	12,5	14	15	15	17
s		30	30	34	36	36	41
d		M20	M20X2,0	M22	M24	M24X2,0	M27
40							
42							
45		11040200045	11042200045	11040220045		11042240045	
48		11040200048	11042200048	11040220048		11042240048	
50		11040200050	11042200050	11040220050	11040240050	11042240050	
55		11040200055	11042200055	11040220055	11040240055	11042240055	
60		11040200060	11042200060	11040220060	11040240060	11042240060	11040270060
65		11040200065	11042200065	11040220065	11040240065	11042240065	11040270065
70		11040200070	11042200070	11040220070	11040240070	11042240070	11040270070
75		11040200075	11042200075	11040220075	11040240075	11042240075	11040270075
80		11040200080	11042200080	11040220080	11040240080	11042240080	11040270080
85		11040200085	11042200085	11040220085	11040240085	11042240085	11040270085
90		11040200090	11042200090	11040220090	11040240090	11042240090	11040270090
100		11040200100	11042200100	11040220100	11040240100	11042240100	11040270100
105		11040200105	11042200105	11040220105	11040240105	11042240105	11040270105
110		11040200110	11042200110	11040220110	11040240110	11042240110	11040270110
115		11040200115	11042200115	11040220115	11040240115	11042240115	11040270115
120		11040200120	11042200120	11040220120	11040240120	11042240120	11040270120
125		11040200125	11042200125	11040220125	11040240125	11042240125	11040270125
130		11040200130	11042200130	11040220130	11040240130	11042240130	11040270130
135		11040200135	11042200135	11040220135	11040240135	11042240135	11040270135
140		11040200140	11042200140	11040220140	11040240140	11042240140	11040270140
145		11040200145	11042200145	11040220145	11040240145	11042240145	11040270145
150		11040200150	11042200150	11040220150	11040240150	11042240150	11040270150
160		11040200160	11042200160	11040220160	11040240160	11042240160	11040270160
170		11040200170	11042200170		11040240170		11040270170
180		11040200180	11042200180		11040240180		11040270180
190		11040200190			11040240190		11040270190
200		11040200200			11040240200		11040270200
220		11040200220			11040240220		
240		11040200240			11040240240		
260		11040200260					

1: L ≤ 50 mm

2: 50 mm < L ≤ 150mm

3: L > 150mm

4: Tolerantie boorgat H7




DIN 609 8.8 ZESKANT PASBOUT MET LANG DRAADGEDEELTE - STAAL

DIN 609 8.8 HEXAGON FIT BOLT WITH LONG THREAD – STEEL

DIN 609 8.8 CORPS DE BOULON AJUSTE A TETE HEXAGONALE AVEC FILET LONG – ACIER

DIN 609 8.8 SECHSKANT-PASSSCHRAUBEN MIT LANGEM GEWINDEZAPFEN - STAHL

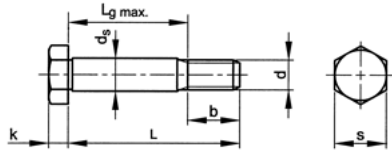

ISO :
DIN : 609
NEN : -
ANSI : B18.3.3M
BS : 4168-7
NF : -



M
St
8.8

P		3,5	2	4	4,5		
b	1	-	-	-	-		
	2	43	43	49	56		
	3	48	48	54	61		
ds	(k6) ⁴	32	32	38	44		
k		19	19	22	26		
s		46	46	55	65		
d	LENGTE	M30	M30X2,0	M36	M42		
60		11040300060					
65		11040300065	11040300065				
70		11040300070	11040300070	11040360070			
75		11040300075	11040300075	11040360075			
80		11040300080	11040300080	11040360080			
85		11040300085	11040300085	11040360085			
90		11040300090	11040300090	11040360090			
100		11040300100	11040300100	11040360100	11040420100		
105		11040300105	11040300105	11040360105	11040420105		
110		11040300110	11040300110	11040360110	11040420110		
115		11040300115	11040300115	11040360115	11040420115		
120		11040300120	11040300120	11040360120	11040420120		
125		11040300125	11040300125	11040360125	11040420125		
130		11040300130	11040300130	11040360130	11040420130		
135		11040300135	11040300135	11040360135	11040420135		
140		11040300140	11040300140	11040360140	11040420140		
145		11040300145	11040300145	11040360145	11040420145		
150		11040300150	11040300150	11040360150	11040420150		
160		11040300160	11040300160	11040360160	11040420160		
170		11040300170	11040300170	11040360170	11040420170		
180		11040300180	11040300180	11040360180	11040420180		
190		11040300190	11040300190	11040360190	11040420190		
200		11040300200		11040360200	11040420200		
220							
240							
260							

1: L ≤ 50 mm
2: 50 mm < L ≤ 150mm
3: L > 150mm
4: Tolerantie boorgat H7

