


UNC 12.9 PASSCHROEVEN - STAAL

UNC 12.9 HEXAGON SOCKET HEAD SHOULDER SCREWS- STEEL

UNC 12.9 VIS DE CENTRAGE A TETE CYLINDRIQUE A SIX PANS CREUX ET A BOUT FILETE REDUIT- ACIER

UNC 12.9 PASS-SCHULTERSCHRAUBEN MIT INNENSECHSKANT- STAHL

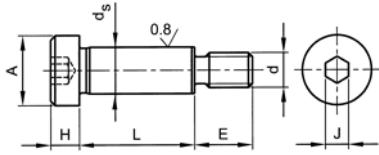

ISO : -
DIN : -
NEN : -
ANSI : B18.3
BS : 2470
NF : -



UNC
St
12.9

Gangen per inch		24	20	18	16	13	11
ds (nom.)	inch	1/4	5/16	3/8	1/2	5/8	3/4
	mm	6,35	7,95	9,5	12,7	15,9	19,05
Tolerantie ds	(max.)	6,299	7,887	9,474	12,649	15,824	18,999
	(min.)	6,248	7,836	9,423	12,598	15,773	18,948
E		9,5	11,1	12,7	15,9	19,05	22,2
A (max.)		9,5	11,1	14,3	19,05	22,2	25,4
H (max.)		4,76	5,56	6,35	7,95	9,5	12,5
J	inch	1/8	5/32	3/16	1/4	5/16	3/8
Nr./inch d		Nr.10	1/4	5/16	3/8	1/2	5/8
LENGTE		4,82	6,35	7,95	9,5	12,7	15,9
3/4		17116048019		17116079019			
1 IN.		17116048025	17116063025	17116079025	17116096025		
1.1/4		17116048031	17116063031	17116079031	17116096031	17116127031	
1.1/2		17116048038	17116063038	17116079038	17116096038	17116127038	
1.3/4			17116063044	17116079044			
2 IN.		17116048050	17116063050	17116079050	17116096050	17116127050	17116158050
2.1/4			17116063057				
2.1/2			17116063063	17116079063	17116096063	17116127063	17116158063
3 IN.				17116079076	17116096076	17116127076	17116158076
3.1/2					17116096088	17116127088	17116158088
4 IN.					17116096101	17116127101	17116158101

